

DESCRIPTION

The certified design listing is considerably flexible in its ability to achieve 1, 2 or 3-hour Exterior Wall Assembly Ratings. Versatility is most obvious in the assemblies' approach to building with common load or non-load bearing Base and Exterior Wall Key Features. This assembly or any assemblies configured with these components is code-compliant meeting the requirements of the National Fire Protection Association Standard (NFPA) 285 for commercial buildings of any height.

ABOUT US


No-Burn intumescent coatings provide the high-performance, code-compliant fire protection needed in new and existing residential and commercial construction. In the presence of extreme heat or fire, intumescent coatings char and swell up to multiple times their original thickness, which shields the substrate and significantly reduces its rate of combustion.

Designed with the professional in mind, our simple one-coat spray application achieves the code compliance you need with a water-based, low VOC emission formula, available in white and tinted coloring.

KEY FEATURES OF THE CERTIFIED DESIGN LISTING

Interior Base Wall Load or Non-load Bearing

- > 1, 2 and 3-hour rated assemblies with one or multiple sheets of 5/8" Type X GWB.
- > Steel studs or non-steel studs: 2x4, 2x6 or other non-combustible base materials, such as concrete, CMU block, etc.
- > Cavity insulation: full-fill or partial-fill: WALLTITE LWP, WALLTITE US, SPRAYTITE COMFORT, ENERTITE G, non-combustible insulation or no insulation.
- > Exterior Sheathing: ½" Fiberglass Mat Ext. GWB, any Fiberglass Mat Ext. GWB (ASTM C1177 compliant) min. ½" thick, cement board or other non-combustible sheathing.

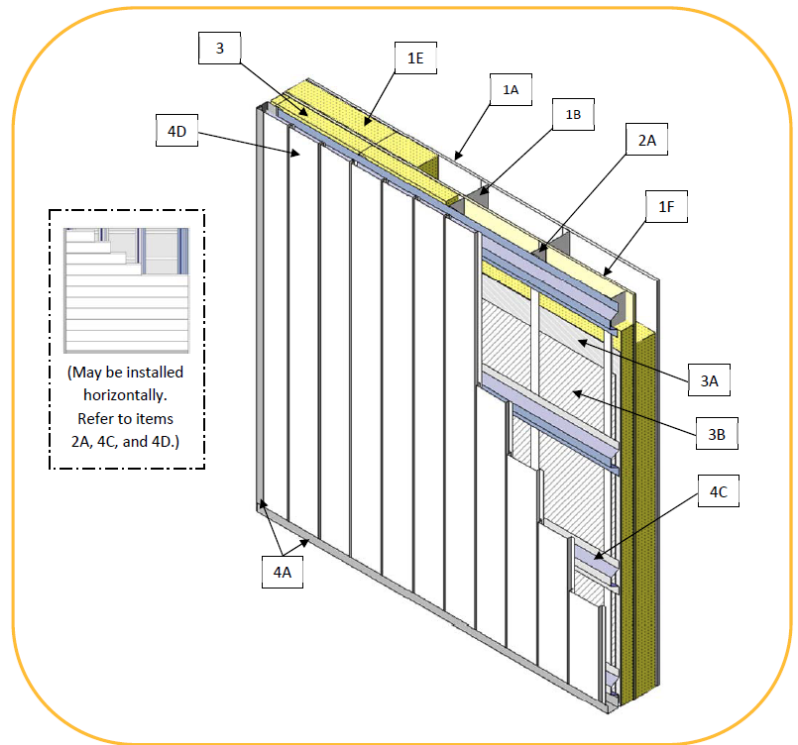

No-Burn Plus ThB intumescent coating was tested over BASF spray foam. The certified or listed design can be found in: [Intertek Design Listing No. BASF/FI 30-09, Code Compliance Research Report \(CCRR\) 1031, 1032 & 0374](#)



Exterior Wall Load or Non-load Bearing

- > 3 ½" exterior insulation or continuous insulation: WALLTITE LWP or WALLTITE US.
- > 20 gauge aluminum flush/architectural wall panels or a thicker metal, combustible cladding oriented vertically or horizontally.
- > 15 wet mils of No-Burn Plus ThB intumescent coating with a 6 wet mil overcoat of exterior paint permits the use of the combustible flush or architectural wall panels.
- > Sealant at typical locations with weep holes permitted.

Code-compliant solutions. Life-saving protection.

No-Burn, Inc.
SALES INFORMATION AND ORDER PLACEMENT
1-800-989-8577
TECHNICAL INFORMATION
1-800-989-8577
www.noburn.com

TRADEMARKS No-Burn, No-Burn logo and Fire Wise are trademarks owned by or licensed to No-Burn, Inc.
LIMITED WARRANTY No-Burn, Inc. warrants that the No-Burn formula will be manufactured to the same specifications and quality, and will perform equally to the tests performed by the independent laboratories when properly applied. Warranty coverage is limited solely to the cost of product purchased hereunder and specifically excludes incidental expenses and consequential damages. The applicator warrants that the product, in its original form from the Manufacturer, will be stored, mixed and/or applied as directed in the guidelines published by No-Burn, Inc., to every reasonably accessible area that has been specified for protection. All implied warranties, from No-Burn, Inc. or the applicator are excluded. There may be situations and materials for which No-Burn will not prevent a fire from igniting or retard the progress of a fire.
POLICY & PROCEDURES All sales of this product by No-Burn, Inc. are subjected to our Policy & Procedures available at <http://noburn.com/policies-procedures>
UPDATES AND CURRENT INFORMATION Revised 01-Jun-2021. The information in this document may change without notice.



PRODUCT DESCRIPTION

No-Burn Plus ThB is an International Building, International Residential, and National Fire Protection Association Life Safety 101 thin film intumescent coating. When exposed to high temperatures and flame, Plus ThB intumesces creating a char-barrier protecting treated substrates from fire. Manufactured in compliance with ISO 9001, as a certified intumescent coating, Plus ThB is applied to spray polyurethane foam insulation, achieving the fire performance prescribed.

ABOUT US

No-Burn intumescent coatings provide the high-performance, code-compliant fire protection needed in new and existing residential and commercial construction. In the presence of extreme heat or fire, intumescent coatings char and swell up to multiple times their original thickness, which shields the substrate and significantly reduces its rate of combustion.

Designed with the professional in mind, our simple one-coat spray application achieves the code compliance you need with a water-based, low VOC emission formula, available in white and tinted coloring.

PRODUCT SPECIFICATIONS

Color: White/Gray/Tinted
[Intumescent Color Wheel & Tinting](#)

White	Gray	Tinted
-------	------	--------

Finish: Flat
 pH: 7-8
 Application: [Best Practices for Application](#)
 Film Thickness: Reference Code and Compliance Report
 Dry Time: 60-90 minutes
 Overcoat: Water-based with pH of 7-8
 Safety: [Plus ThB Safety Data Sheet \(SDS\)](#)
 VOC Content: 18 g/L
 VOC Emissions: [CDPH \(CA Spec 01350\) Compliant](#)



PACKAGING/STORAGE

Pails: 5 gallons (19 L), 58.5 lbs.
 Drums: 55 gallon drum (208 L), net 45 gallons (170 L) 586.5 lbs.
 Shelf Life: 12 months in unopened sealed containers, properly stored
 Storage: 40°F (4°C) – 90° F (32°C)
[Best Practices for Safe Handling & Storage](#)

PLUS ThB

Code Requirement	Compliance
Thermal Barrier Assembly	15 minutes: ER-305 , TER 1905-03
Ignition Barrier Assembly	5± minutes: ER-305 , TER 1905-03
Exterior Rated Wall Assembly	Intertek Design Listing: BASF/FI 30-09
Interior Finish	FS 0 SD 10, Class A
Vapor Retarder	5 perms, Class III
USDA Incidental Food Contact	ANSI/NSF 51 Food Zone Materials

Code-compliant solutions. Life-saving protection.

No-Burn, Inc.
SALES INFORMATION AND ORDER PLACEMENT
1-800-989-8577
TECHNICAL INFORMATION
1-800-989-8577
www.noburn.com

TRADEMARKS No-Burn, No-Burn logo and Fire Wise are trademarks owned by or licensed to No-Burn, Inc.
LIMITED WARRANTY No-Burn, Inc. warrants that the No-Burn formula will be manufactured to the same specifications and quality, and will perform equally to the tests performed by the independent laboratories when properly applied. Warranty coverage is limited solely to the cost of product purchased hereunder and specifically excludes incidental expenses and consequential damages. The applicator warrants that the product, in its original form from the Manufacturer, will be stored, mixed and/or applied as directed in the guidelines published by No-Burn, Inc., to every reasonably accessible area that has been specified for protection. All implied warranties, from No-Burn, Inc. or the applicator are excluded. There may be situations and materials for which No-Burn will not prevent a fire from igniting or retard the progress of a fire.
POLICY & PROCEDURES All sales of this product by No-Burn, Inc. are subjected to our Policy & Procedures available at <http://noburn.com/policies-procedures>
UPDATES AND CURRENT INFORMATION Revised 08-Sept-2021. The information in this document may change without notice.



Find us in

MasterSpec®

a product of The American Institute of Architects

SECTION 072119 – FOAMED-IN-PLACE INSULATION

PART 1 – GENERAL

1.1 SUMMARY

A. Section Includes:

1. Closed-cell spray polyurethane foam insulation.
2. Open-cell spray polyurethane foam insulation.
3. Accessories including thermal barrier and ignition barrier coatings.

B. Related Requirements:

1. Section 072100 "Thermal Insulation" for foam-plastic board insulation.
2. Section 075700 "Coated Foamed Roofing" for spray polyurethane foam insulation used for roofing applications.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Sustainable Design Submittals:

1. Product Data: For paints and coatings, indicating VOC content.
2. Evaluation Reports or Certificates: For paints and coatings, indicating compliance with requirements for low-emitting materials.

1.3 INFORMATIONAL SUBMITTALS

A. Test and Evaluation Reports:

1. Product Test Reports: For each product, for tests performed by qualified testing agency.
2. Research Reports:
 - a. For spray-applied polyurethane foam-plastic insulation, from [an agency acceptable to authorities having jurisdiction] [ICC-ES] [UES/IAPMO] [DrJ TER] <Insert evaluation agency> showing compliance with <Insert requirement>.
 - b. For fire-protective coatings applied to spray-applied polyurethane foam-plastic insulation, from [UES/IAPMO] [DrJ TER] [Intertek] <Insert evaluation agency> showing compliance with <Insert requirement>.

B. Field Quality-Control Submittals:

1. Field quality-control reports for foamed-in-place insulation.

C. Qualification Statements: For Installer.

1.4 QUALITY ASSURANCE

- ###### A. Installer Qualifications: A[n authorized] representative who is trained on applications of spray-applied polyurethane foam-plastic insulation and intumescent coatings, or similar product types [and approved by manufacturer].

PART 2 – PRODUCTS

2.1 CLOSED-CELL SPRAY POLYURETHANE FOAM INSULATION

- ###### A. Closed-Cell Spray Polyurethane Foam: ASTM C1029, Type II, minimum density of [1.5 lb/cu. ft. (24 kg/cu. m)] <Insert density> and minimum aged R-value at 1-inch (25.4-mm) thickness of 6.2 deg F x h x sq. ft./Btu at 75 deg F (43 K x sq. m/W at 24 deg C).

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. BASF Corporation.
 - b. Carlisle Spray Foam Insulation.
 - c. Demilec; a brand of Huntsman Building Products.
 - d. Gaco Western LLC.
 - e. Icynene; a brand of Huntsman Building Products.
 - f. Johns Manville; a Berkshire Hathaway company.
 - g. Lapolla; a brand of Huntsman Building Products.
 - h. SWD Urethane Company.
 - i. <Insert Manufacturer>.

2. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: [25] [75] <Insert value> or less.
 - b. Smoke-Developed Index: [450] <Insert value> or less.

3. Fire Propagation Characteristics: Passes [NFPA 285] [and] [NFPA 276] testing as part of an approved assembly.

2.2 OPEN-CELL SPRAY POLYURETHANE FOAM INSULATION

- ###### A. Open-Cell Spray Polyurethane Foam: Spray-applied polyurethane foam using water as a blowing agent. Minimum density of [0.4 lb/cu. ft. (6.4 kg/cu. m)] <Insert density> and minimum aged R-value at 1-inch (25.4-mm) thickness of 3.4 deg F x h x sq. ft./Btu at 75 deg F (24 K x sq. m/W at 24 deg C).

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. BASF Corporation.
 - b. Carlisle Spray Foam Insulation.
 - c. Demilec; a brand of Huntsman Building Products.
 - d. Gaco Western LLC.
 - e. Icynene; a brand of Huntsman Building Products.
 - f. Johns Manville; a Berkshire Hathaway company.
 - g. Lapolla; a brand of Huntsman Building Products.
 - h. SWD Urethane Company.
 - i. <Insert Manufacturer>.

2. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: [25] [75] <Insert value> or less.
 - b. Smoke-Developed Index: [450] <Insert value> or less.

3. Fire Propagation Characteristics: Passes [NFPA 285] [and] [NFPA 276] testing as part of an approved assembly.

2.3 ACCESSORIES

- ###### A. Thermal Barrier Coating: Fire-protective intumescent coating formulated for application over polyurethane foam plastics, compatible with insulation, and passes NFPA 286, FM 4880, UL 1040, or UL 1715 testing as part of an approved assembly.

1. Basis-of-Design Product: Subject to compliance with requirements, provide No-Burn, Inc.; Plus ThB intumescent coating.
2. Performance Criteria:
 - a. Finish: Flat.
 - b. Color: [White] [Gray] [Tinted].
 - c. VOC Content: 18 g/L or less of water in accordance with EPA 24.
 - d. Solids by Volume: 70 percent.
3. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: [50] [450] <Insert value> or less.

4. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.

5. Topcoat: As recommended in writing by intumescent thermal barrier manufacturer as compatible with substrate materials.

- a. Decorative Topcoat: 6- to 8-mil (0.15- to 0.20-mm) thick, water-based latex-based paint for interior conditioned spaces recommended in writing by intumescent thermal barrier manufacturer as compatible with substrate materials.
- b. Protective Topcoat, Interior: 6- to 8-mil (0.15- to 0.20-mm) thick, exterior topcoat, VOC compliant, for interior unconditioned spaces subject to constant high humidity, condensation, or direct contact with moisture.
- c. Protective Topcoat, Exterior: 6- to 8-mil (0.15- to 0.20-mm) thick, continuous insulation exterior topcoat as a component of exterior wall systems as indicated by Intertek Design Listing BASF/FI 30-09 when installed behind approved claddings.

- ###### B. Ignition Barrier Coating: Fire-protective coating formulated for application over polyurethane foam plastics, compatible with insulation, and in compliance with ICC-ES AC377, Appendix X. Products identified with testing agency markings.

1. Basis-of-Design Product: Subject to compliance with requirements, provide No-Burn, Inc.; Plus ThB.
2. Performance Criteria:
 - a. Finish: Flat.
 - b. Color: [White] [Gray] [Tinted].

- c. VOC Content: 18 g/L or less of water in accordance with EPA 24.

- d. Solids by Volume: 60 to 70 percent.

3. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

- a. Flame-Spread Index: 25 or less.
- b. Smoke-Developed Index: 50 or less.

4. Topcoat: As recommended in writing by intumescent thermal barrier manufacturer as compatible with substrate materials.

- a. Decorative Topcoat: 6- to 8-mil (0.15- to 0.20-mm) thick, water-based latex-based paint for interior conditioned spaces recommended in writing by intumescent thermal barrier manufacturer as compatible with substrate materials.

- b. Protective Topcoat, Interior: 6- to 8-mil (0.15- to 0.20-mm) thick, heavy-duty protective topcoat, VOC compliant, for interior unconditioned spaces subject to constant high humidity, condensation, or direct contact with moisture.

PART 3 – EXECUTION

3.1 EXAMINATION

- ###### A. Examine substrates and conditions for compliance with manufacturer's requirements for surface treatments, maximum moisture content, and other conditions affecting performance of the Work.

- ###### B. Proceed with coating application only after unsatisfactory conditions have been corrected and surfaces are dry.

3.2 PREPARATION

- ###### A. Verify that substrates are clean, dry, and free of substances that are harmful to insulation.

3.3 INSTALLATION

- A. Comply with insulation manufacturer's written instructions applicable to products and applications.
- B. Spray insulation to envelop entire area to be insulated and fill voids.
- C. Do not exceed maximum thicknesses recommended by manufacturer. Do not spray into rising foam.
- D. Framed Construction: Install into cavities formed by framing members to achieve thickness indicated on Drawings.
- E. Cavity Walls: Install into cavities to [thickness indicated on Drawings] [fully fill void].
- F. Miscellaneous Voids: Apply in accordance with manufacturer's written instructions.
- G. Apply fire-protective intumescent coatings in accordance with manufacturer's written instructions and to comply with requirements for listing and labeling for fire-propagation characteristics and surface-burning characteristics specified.

1. Use equipment and techniques best suited for substrate and type of material applied as recommended by coating manufacturer.
2. Apply coatings to prepared surfaces as soon as practical after preparation and before subsequent surface soiling or deterioration.
3. Apply coatings to produce surface films without holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Produce sharp lines and color breaks.

3.4 FIELD QUALITY CONTROL

- ###### A. Continuously monitor wet film thickness (WFT) by performing periodic checks to ensure correct thicknesses are applied.
1. Measuring Thickness:
 - a. Install medallions prior to applying intumescent thermal barrier coating to measure wet film thickness and dry film thickness.
 - b. Perform thickness measurements by measuring representative sample of installed intumescent coating material by means of calipers, optical comparators, or similar devices.

3.5 PROTECTION

- ###### A. Protect installed insulation from damage due to harmful weather exposures, physical abuse, and other causes.

END OF SECTION 072119



Made in the USA



SUBMITTAL SHEET